



JOHN DEERE

ENGINE PERFORMANCE CURVE


Rating: M2 - 80 hp (60 kW) @ 2500 rpm

Application: Marine

PowerTech 4.5 L Engine

Model: **4045DFM70**

(Propeller Power is approximately 97% of Crankshaft Power)

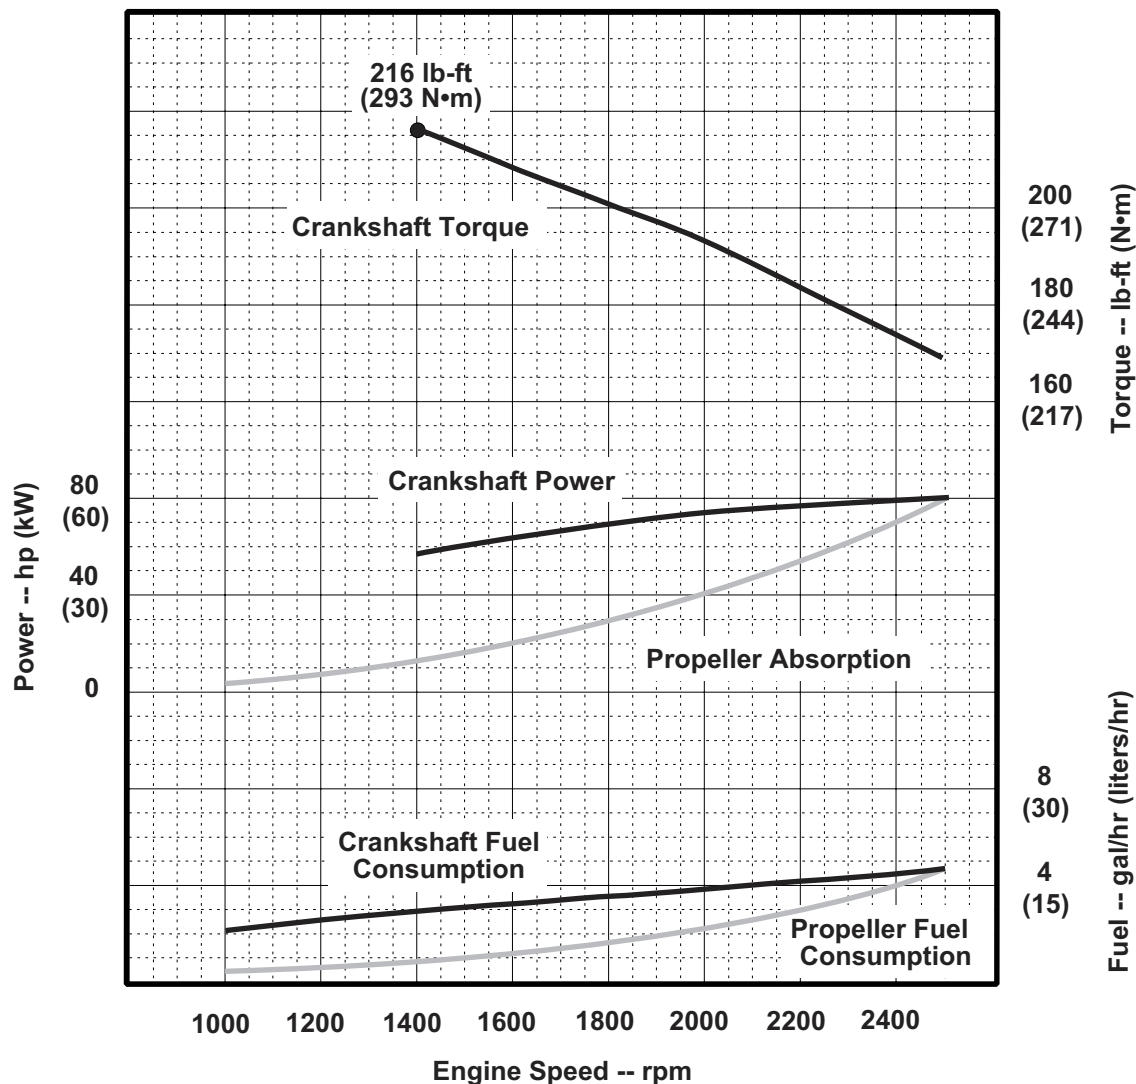

Air Intake Restriction 12 in.H₂O (3 kPa)
Exhaust Back Pressure 30 in.H₂O (7.5 kPa)

Gross power guaranteed within + or - 5% at SAE J1995 and ISO 8665 conditions:

- 77 °F (25 °C) air inlet temperature
- 29.31 in.Hg (99 kPa) barometer
- 104 °F (40 °C) fuel inlet temperature
- 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Conversion factors:

- Power: kW = hp x 0.746
- Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
- Torque: N·m = lb-ft x 1.356

All values are from currently available data and are subject to change without notice.

Notes:

Tier-2 Emission Certifications:

Certified by:

- EPA Commercial Marine
 - IMO Exempt
- Ref: Engine Emission Label

NEAL LEEDER
3 FEB 04

* Revised Data

Curve: 4045DFM7080 Sheet 1 of 2
February 2004

Common Specifications:

General Data

Model 4045DFM70
 Number of Cylinders 4
 Bore and Stroke--in.(mm)..... 4.2 x 5.0 (107 x 127)
 Displacement--in³ (L)275 (4.5)
 Compression Ratio 17.6:1
 Valves per Cylinder -- Intake / Exhaust..... 1 / 1
 Firing Order..... 1-3-4-2
 Combustion System..... Direct Injection
 Engine Type In-line, 4-Cycle
 Aspiration Natural
 Engine Crankcase Vent System Closed
 Maximum Crankcase Pressure--in. H₂O (kPa)2 (0.5)

Physical Data

(Includes Engine, Flywheel Housing, Flywheel & Electrics)
 Length--in.(mm)34.8 (885)
 Width--in.(mm)28.1 (713)
 Height--in.(mm)35.9 (912)
 Weight, dry--lb (kg).....963 (437)
 Center of Gravity Location
 From Rear Face of Block (X-axis)--in.(mm) 10.6 (270)
 Right of Crankshaft (Y-axis)--in.(mm)..... 7.4 (189)
 Above Crankshaft (Z-axis)--in.(mm).....16.9 (428)
 Max. Allow. Static Bending Moment at Rear Face
 of Flywhl Hsg w/5-G Load--lb-ft (N•m)600 (814)
 Thrust Bearing Load Limit (Forward)--lb (N)900 (4003)
 Maximum Installed Angle
 Front Up--degrees.....12*
 Front Down--degrees 0

Air System

Minimum Ventilation Area--in² (m²).....47 (0.03)
 Maximum Allowable Air Temperature Rise
 Ambient to Engine Inlet--°F (°C)30 (17)
 Engine Air Flow--ft³/min (m³/min) 166 (4.7)
 Maximum Air Intake Restriction
 Dirty Air Cleaner--in. H₂O (kPa).....25 (6.3)
 Clean Air Cleaner--in. H₂O (kPa)..... 12 (3.0)

Engine Specification Data

Cooling System

Engine Heat Rejection--BTU/min (kW) 3415 (60)
 Engine Radiated Heat--BTU/min (kW).....507 (8.9)
 Coolant Flow--gal/min (L/min).....46* (178)
 Minimum Coolant Fill Rate--gal/min (L/min) 3.2 (12)
 Thermostat Start to Open--°F (°C)..... 180 (82)
 Thermostat Fully Open--°F (°C).....203 (95)
 Maximum Top Tank Temperature--°F (°C)212 (100)
 Minimum Water-to-Boil Temperature--°F (°C)..... 90 (32)
 Recommended Pressure Cap--psi (kPa)..... 10 (70)
 Max. Water Pump Inlet Restriction--in. H₂O (kPa).. 40 (10)
 Max. Pressure Drop Across Keel Cooler--psi (kPa) .. 6 (40)
 Engine Coolant Capacity--qt (L) 13* (12*)

Electrical System

Recommended Battery Capacity **12 Volt 24 Volt**
 Cold Cranking Amps @ 32 °F (0 °C)--amp..640 570
 Max. Starting Circuit Resistance--Ohms0.0012 ... 0.002
 Starter Rolling Current @ 32 °F (0 °C)--amp ...780 600

Exhaust System

Exhaust Temperature--°F (°C)..... 1139 (615)
 Exhaust Gas Flow--ft³/min (m³/min).....491 (14)
 Maximum Back Pressure--in. H₂O (kPa) 30 (7.5)
 Recommended Minimum Exhaust Outlet Size--in.(mm)
 Dry2.5 (65)
 Wet.....3.0 (75)

Fuel System

Fuel Injection Pump Stanadyne DB-2
 Governor Type Mechanical
 Governor Regulation--percent 7 to 10
 Total Fuel Flow--lb/hr (kg/hr).....231 (105)
 Total Fuel Flow--gal/hr (L/hr)..... 33 (124)
 Fuel Consumption--lb/hr (kg/hr).....32.8 (14.9)
 Fuel Consumption--gal/hr (L/hr)..... 4.6 (17.5)
 Maximum Leak Off Line Pressure--psi (kPa)..... 2 (14)
 Max. Fuel Transfer Pump Suction Lift--ft (m) fuel 3 (0.9)
 Max. Fuel Height Above Transfer Pump--ft (m) 5 (1.4)
 Max. Fuel Inlet Temperature--°F (°C) 212 (100)
 Fuel Filter Size @98% Efficiency--Micron 2

Lubrication System

Oil Pressure @ Rated Speed--psi (kPa)..... 50 (345)
 Oil Pressure @ Low Idle--psi (kPa) 15 (105)

Sea Water System

Sea Water Pump Flow--gal/min (L/min)..... 31 (118)
 Maximum Inlet Restriction--in. H₂O (kPa) 120 (30)
 Maximum Outlet Pressure--psi (kPa)..... 10 (69)
 Maximum Suction Lift--ft (m)..... 10 (3)

Performance Data

Rated Power--hp (kW) 80 (60)
 Rated Power (Metric) Fuel @ 77 °F (25 °C)--PS 81.6
 Rated Speed--rpm 2500
 Rated Torque--lb-ft (N•m)..... 169 (229)
 Peak Torque--lb-ft (N•m).....218 (296)
 Peak Torque Speed--rpm..... 1400
 Torque Rise--percent 29
 Low Idle Speed--rpm 750
 BMEP--psi (kPa)92 (636)
 Smoke @ Rated Speed--Bosch No. 1.5
 Noise--dB(A) @ 1 m NA

Fuel Consumption for Typical Propeller Curve

Engine rpm	Crank. Power hp (kW)	Crank. Torque lb-ft (N•m)	Prop. Absorption hp (kW)	Prop. Fuel gal/hr(L/hr)
2500	80 (60.0)	169 (229)	80 (60.0)	4.6 (17.5)
2400	80 (59.3)	173 (235)	71 (53.1)	4.0 (15.2)
2200	77 (57.2)	182 (247)	55 (40.9)	3.0 (11.5)
2000	74 (55.0)	194 (263)	41 (30.7)	2.3 (8.7)
1800	68 (51.0)	200 (271)	30 (22.4)	1.7 (6.6)
1600	63 (47.0)	207 (281)	21 (15.7)	1.3 (4.9)
1400	58 (43.0)	216 (293)	14 (10.5)	0.9 (3.5)
1200	50 (37.0)	217 (294)	9 (6.6)	0.6 (2.4)
1000	40 (30.0)	211 (286)	5 (3.8)	0.4 (1.5)

Data based on keel-cooled engine.
 All values at rated speed and power with standard options unless otherwise noted.

* Revised Data
 Curve: 4045DFM7080 Sheet 2 of 2
 February 2004