



JOHN DEERE

**ENGINE PERFORMANCE CURVE**


Rating: M2 - 400 hp (298 kW) @ 1900 rpm

**PowerTech 12.5 L Engine**

Model: **6125AFM75**

(Propeller Power is approximately 97% of Crankshaft Power)

Application: Marine

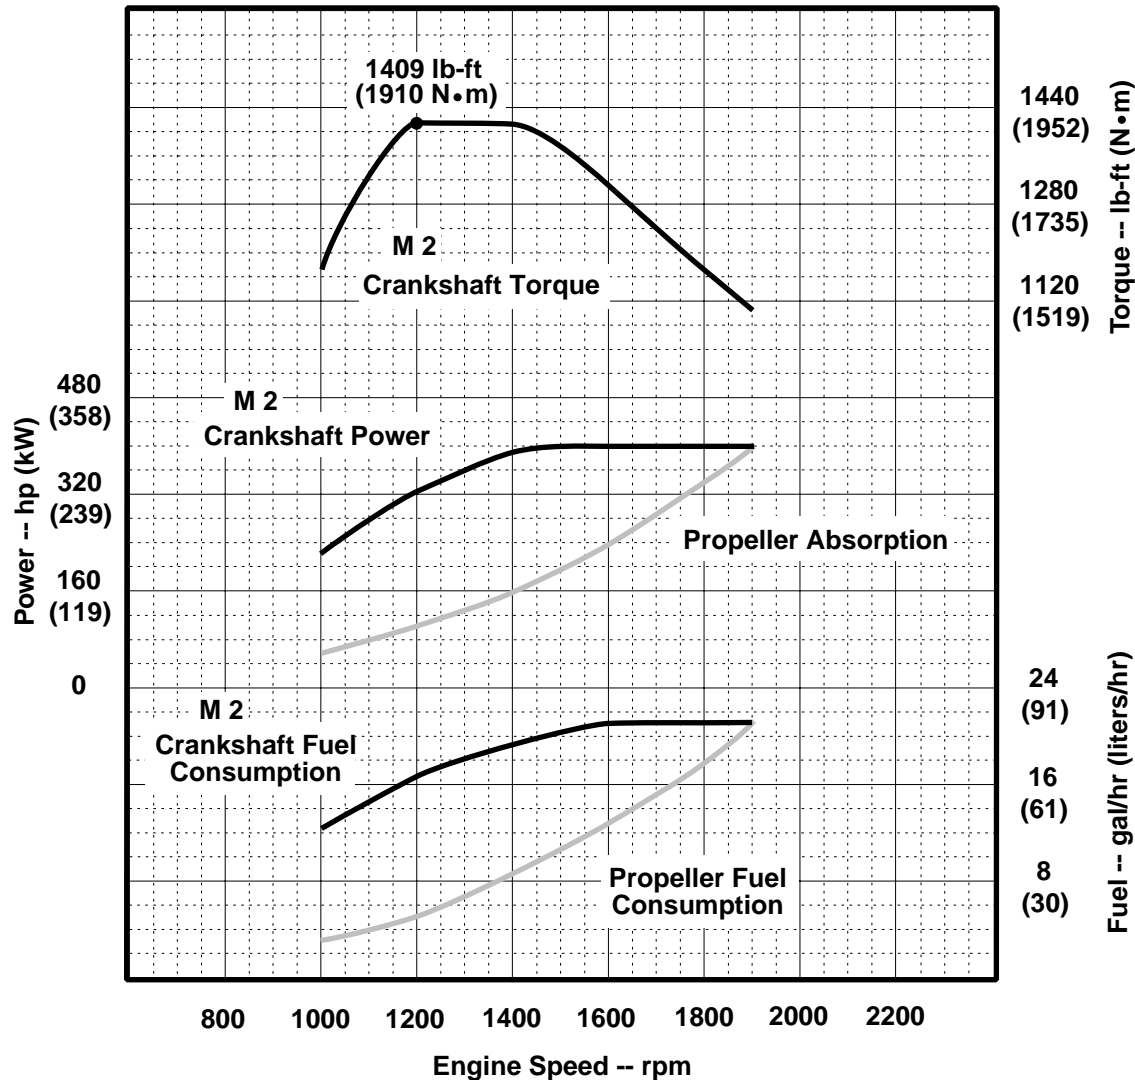

Air Intake Restriction ..... 12 in.H<sub>2</sub>O (3 kPa)  
 Exhaust Back Pressure ..... 30 in.H<sub>2</sub>O (7.5 kPa)

Gross power guaranteed within + or - 5% at SAE J1995 and ISO 8665 conditions:  
 77 °F (25 °C) air inlet temperature  
 29.31 in.Hg (99 kPa) barometer  
 104 °F (40 °C) fuel inlet temperature  
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Conversion factors:  
 Power: kW = hp x 0.746  
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg  
 Torque: N·m = lb-ft x 1.356

All values are from currently available data and are subject to change without notice.

Notes:

Tier-2 Emission Certifications:	Certified by:
<ul style="list-style-type: none"> <li>EPA Commercial Marine (40 CFR Part 94)</li> <li>IMO Annex VI</li> </ul> Ref: Engine Emission Label	<i>NEAL CEEPER</i> <i>11 OCTOBER 2004</i>

\* Revised Data  
 Curve: 6125AFM75400M2..... Sheet 1 of 2  
 October 2004

## Common Specifications:

### General Data

Model ..... 6125AFM75  
 Number of Cylinders ..... 6  
 Bore and Stroke--in.(mm)..... 5.00 x 6.50 (127 x 165)  
 Displacement--in<sup>3</sup> (L) .....766 (12.5)  
 Compression Ratio ..... 17.0 : 1  
 Valves per Cylinder -- Intake / Exhaust..... 2 / 2\*  
 Firing Order..... 1-5-3-6-2-4  
 Combustion System..... Unit Injection  
 Engine Type ..... In-line, 4-Cycle  
 Aspiration ..... Turbocharged and Aftercooled  
 Aftercooling System..... Engine Coolant  
 Engine Crankcase Vent System ..... Open  
 Maximum Crankcase Pressure--in. H<sub>2</sub>O (kPa) .....2 (0.5)

### Physical Data

(Includes Engine, Flywheel Housing, Flywheel & Electrics)  
 Length--in.(mm) .....56.1 (1426)  
 Width--in.(mm) .....33.5 (850)  
 Height (centerline to top)--in.(mm) .....30.5 (774)  
 Height (centerline to bottom)--in.(mm) .....14.3 (364)  
 Weight, dry--lb (kg).....3025 (1372)  
 Center of Gravity Location  
     From Rear Face of Block (X-axis)--in. (mm) 20.9\* (530\*)  
     Right of Crankshaft (Y-axis)--in. (mm).....0.45\* (12\*)  
     Above Crankshaft (Z-axis)--in. (mm).....9.4\* (240\*)  
 Max. Allow. Static Bending Moment at Rear Face  
     of Flywhl Hsg w/5-G Load--lb-ft (N•m) .....600 (814)  
 Thrust Bearing Load Limit (Forward)--lb (N) ....1835 (8162)  
 Maximum Installed Angle  
     Front Up--degrees..... 12  
     Front Down--degrees ..... 0

### Air System

Minimum Ventilation Area--in<sup>2</sup> (m<sup>2</sup>).....254.2 (0.164)  
 Maximum Allowable Air Temperature Rise  
     Ambient to Engine Inlet--°F (°C) .....30 (17)  
 Engine Air Flow--ft<sup>3</sup>/min (m<sup>3</sup>/min) .....943 (26.7)  
 Intake Manifold Pressure--psi (kPa).....25 (170)  
 Maximum Air Intake Restriction  
     Dirty Air Cleaner--in. H<sub>2</sub>O (kPa) .....25 (6.25)  
     Clean Air Cleaner--in. H<sub>2</sub>O (kPa)..... 12 (3.0)

## Engine Specification Data

### Cooling System

Engine Heat Rejection--BTU/min (kW) ..... 16,239 (285.5)  
 Engine Radiated Heat--BTU/min (kW)..... 2230 (39.2)  
 Coolant Flow--gal/min (L/min).....95 (358)  
 Minimum Coolant Fill Rate--gal/min (L/min) ..... 3.2 (12)  
 Thermostat Start to Open--°F (°C) ..... 160 (71)  
 Thermostat Fully Open--°F (°C)..... 183 (84)  
 Maximum Top Tank Temperature--°F (°C) ..... 212 (100)  
 Minimum Sea Water-to-Boil Temperature--°F (°C) .. 90 (32)  
 Min. Water Pump Inlet Pressure--in. H<sub>2</sub>O (kPa) ..... 00 (00)  
 Recommended Pressure Cap--psi (kPa)..... 15 (100)  
 Max. Pressure Drop Across Keel Cooler--psi (kPa) .. 6 (40)  
 Engine Coolant Capacity--qt (L) ..... 38.0 (36)

### Electrical System

Recommended Battery Capacity **12 Volt** **24 Volt**  
 Cold Cranking Amps @ 32 °F (0 °C)--amp 1800 ..... 900  
 Max. Starting Circuit Resistance--Ohms.....0.0012 ... 0.002  
 Starter Rolling Current @ 32 °F (0 °C)--amp . 1280 ..... 600

### Exhaust System

Exhaust Temperature--°F (°C) ..... 714 (379)  
 Exhaust Gas Flow--ft<sup>3</sup>/min (m<sup>3</sup>/min) .....2062 (58)  
 Min. Exhaust Pipe Diameter, Dry--in.(mm) ..... 5.0 (125)  
 Min. Exhaust Pipe Diameter, Wet--in.(mm) ..... 6.0 (150)  
 Max. Allowable Back Pressure--in. H<sub>2</sub>O (kPa) ..... 30 (7.5)  
 Max. Weight on Turbocharger--lb (kg) ..... 90 (41)

### Fuel System

ECU Description ..... John Deere Electronic Control  
 Fuel Injection Pump ..... Unit Injectors  
 Governor Type .....Electronic  
 Governor Regulation--percent ..... 0 to 5.7  
 Total Fuel Flow--lb/hr (kg/hr)..... 248 (114.3)  
 Total Fuel Flow--gal/hr (L/hr)..... 35.5 (134.4)  
 Min. Rec'd. Fuel Line ID--in.(mm).....0.25 (6.5)  
 Min. Rec'd. Fuel Line Size ..... -5  
 Fuel Consumption--lb/hr (kg/hr)..... 141.3 (66.0)  
 Fuel Consumption--gal/hr (L/hr)..... 20.5 (77.6)  
 Maximum Leak Off Line Pressure--psi (kPa)..... 11.6 (80)  
 Max. Fuel Transfer Pump Suction Lift--ft (m) fuel ... 10 (3.0)  
 Max. Fuel Inlet Restriction--in. H<sub>2</sub>O (kPa) .....-120 (-30.0)  
 Max. Fuel Height Above Transfer Pump--ft (m) ..... 10 (3.0)  
 Max. Fuel Inlet Temperature--°F (°C) ..... 194 (90)  
 Fuel Filter Size @98% Efficiency--Micron ..... 2

### Lubrication System

Oil Pressure @ Rated Speed--psi (kPa) ..... 45 (310)  
 Oil Pressure @ Low Idle--psi (kPa) ..... 20 (138)

### Sea Water System

Sea Water Pump Flow--gal/min (L/min)..... 86 (327)  
 Maximum Inlet Restriction--in. H<sub>2</sub>O (kPa) ..... 120 (30)  
 Maximum Outlet Pressure--psi (kPa)..... 20 (140)  
 Maximum Suction Lift--ft (m)..... 10 (3.0)

### Performance Data

Rated Power--hp (kW) ..... 400 (298)  
 Rated Power (Metric) Fuel @ 77 °F (25 °C)--PS ..... 405.2  
 Rated Speed--rpm ..... 1900  
 Rated Torque--lb-ft (N•m)..... 1105 (1498)  
 Peak Torque--lb-ft (N•m) ..... 1409 (1910)  
 Peak Torque Speed--rpm..... 1200  
 Torque Rise--percent ..... 30  
 Low Idle Speed--rpm ..... 600  
 BMEP--psi (kPa) .....212 (1459)  
 Smoke @ Rated Speed--Bosch No. ....<1.0

### Fuel Consumption for Typical Propeller Curve

Engine rpm	Crank. Power hp (kW)	Crank. Torque lb-ft (N•m)	Prop. Absorption hp (kW)	Prop. Fuel gal/hr(L/hr)
1900	400 (298)	1105 (1498)	400 (298)	21.1 (79.7)
1800	400 (298)	1166 (1581)	340 (253)	17.9 (67.8)
1600	400 (298)	1277 (1731)	239 (178)	12.7 (48.0)
1400	375 (280)	1312 (1779)	160 (119)	8.6 (32.4)
1200	322 (240)	1409 (1910)	98 (73.1)	5.1 (19.3)
1000	222 (165)	1165 (1579)	57 (42.3)	3.0 (11.4)

Data based on keel-cooled engine.  
 All values at rated speed and power with standard options unless otherwise noted.

\* Revised Data  
 Curve: 6125AFM75400M2 ..... Sheet 2 of 2  
 October 2004