



# JOHN DEERE

## PowerTech™ **4045T** Diesel Engine Specifications

### PERFORMANCE DATA

#### Rated Power

Intermittent 99 hp (74 kW) @ 2500 rpm  
Continuous 90 hp (67 kW) @ 2500 rpm

#### Peak Torque


Intermittent 272 lb-ft (369 N.m) @ 1400 rpm

#### Fuel Economy



BSFC 0.394 lb/hp-hr (240 g/kWh) @ 2500 rpm

RATED BHP is the power rating for variable speed and load applications where full power is required intermittently. CONTINUOUS BHP is the power rating for applications operating under a constant load and speed for long periods of time. POWER OUTPUT is within + or - 5% at standard SAE J 1995 and ISO 3046.

TIER 2 EMISSION CERTIFICATIONS: CARB, EPA, and EU.

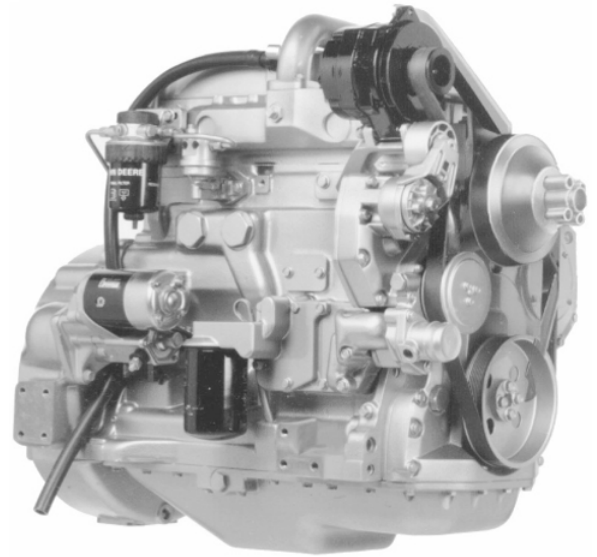

### PERFORMANCE CURVE

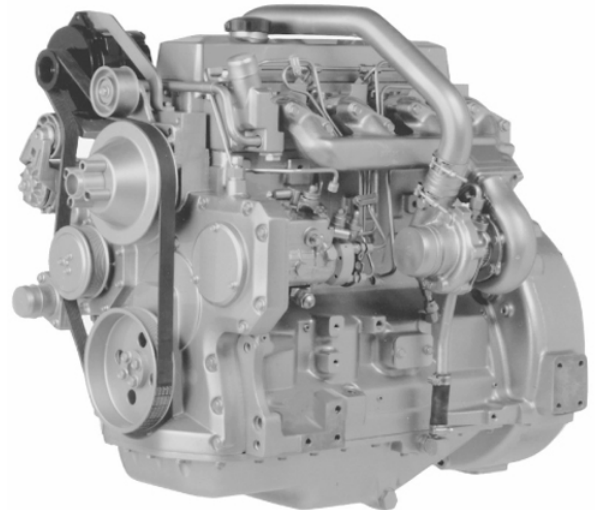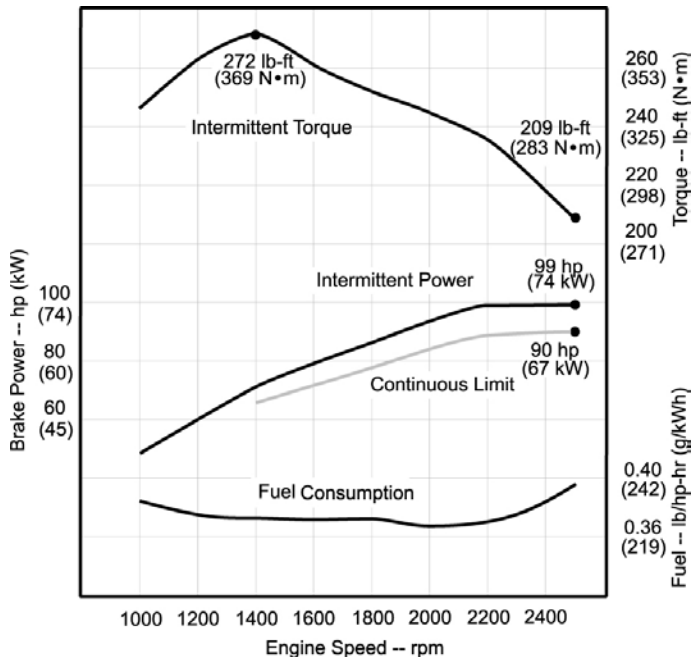

Photographs may show non-standard equipment





PowerTech™  
**4045T Diesel Engine**  
Specifications

## GENERAL DATA

Model	4045TF270	Aspiration	Turbocharged
Number of Cylinders	4	Length - in (mm)	33.9 (860)
Displacement - L (cu.in)	4.5 (276)	Width - in (mm)	24.1 (612)
Compression Ratio	17.0:1	Height - in (mm)	39.1 (994)
Bore and Stroke - in. (mm)	4.19 x 5.00 (106 x 127)	Weight - lb. (kg)	872 (396)
Engine Type	In-line, 4-Cycle		

## DIMENSIONS

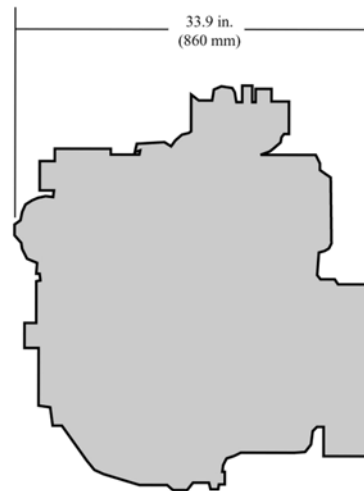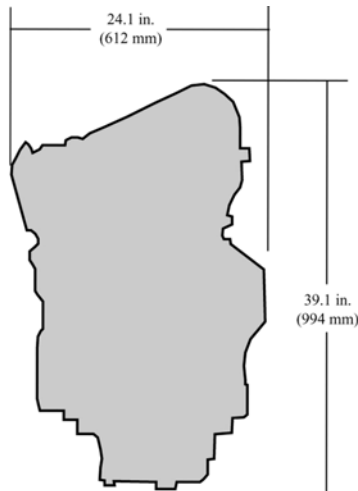

## FEATURES AND BENEFITS

### Dynamically Balanced Crankshaft

- Crankshafts are formed from nodular iron

### Forged-Steel Connecting Rods

- Unique 45-degree design permits use of larger crankshaft connecting-rod bearings for increased durability

### Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

### Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

### 500-Hour Oil Change

- Customers save significant costs on oil, filters and labor with a 500-hour oil change interval

### Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

### Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

### Electronic-Controlled Rotary Injection Pump

- Electronic-controlled rotary injection pump distributes the precise amount of fuel required by each cylinder at exactly the right time
- Electronic controls monitor engine speed and load to determine fuel timing

### Optional Engine-Balancer Shafts

- Provides smooth engine operation

*Specifications and design subject to change without notice*



John Deere Power Systems  
3801 W. Ridgeway Ave.  
PO Box 5100  
Waterloo, IA 50704-5100  
Phone (800) 533-6446  
Fax (319) 292-5075

John Deere Power Systems  
Usine de Saran  
La Foulonnerie - B.P. 11013  
45401 Fleury-les-Aubrais Cedex-France  
Phone (33) 2 38 82 61 19  
Fax (33) 2 38 82 60 00